SDFS023A - D2932, MARCH 1987 - REVISED OCTOBER 1993

• 8-Line to 1-Line Multiplexers Can Perform as:

Boolean Function Generators Parallel-to-Serial Converters Data Source Selectors

 Package Options Include Plastic Small-Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs


description

These monolithic data selectors/multiplexers provide full binary decoding to select one of eight data sources. The strobe (\overline{G}) input must be at a low logic level to enable the data selection/multiplexing function. A high level at the strobe terminal forces the W output high and the Y output low.

The SN54F151B is characterized for operation over the full military temperature range of -55° C to 125°C. The SN74F151B is characterized for operation from 0°C to 70°C.

SN54F151B J PACKAGE SN74F151B D OR N PACKAGE (TOP VIEW)										
D3 [D2 [D1 [D0 [1 2 3) 16 15 14] V _{CC}] D4] D5							
00 [Y [W [G [GND [4 5 6 7 8	13 12 11 10 9] D6] D7] A] B] C							

SN54F151B . . . FK PACKAGE (TOP VIEW)



NC - No internal connection


	FUNCTION TABLE									
	IN	PUTS	-	OUTPUTS						
	SELECT		STROBE		-013					
С	В	Α	G	Y	W					
X	Х	Х	Н	L	Н					
L L	L	L	L	D0	D0					
L L	L	Н	L	D1	D1					
L L	н	L	L	D2	D2					
L	н	Н	L	D3	D3					
н	L	L	L	D4	D4					
н	L	Н	L	D5	D5					
н	Н	L	L	D6	D6					
н	Н	Н	L	D7	D7					

D0, D1, \dots D7 = the level of the respective D input.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

SDFS023A - D2932, MARCH 1987 - REVISED OCTOBER 1993

logic symbol[†]




 \dagger This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, J, and N packages.



SDFS023A - D2932, MARCH 1987 - REVISED OCTOBER 1993

logic diagram (positive logic)

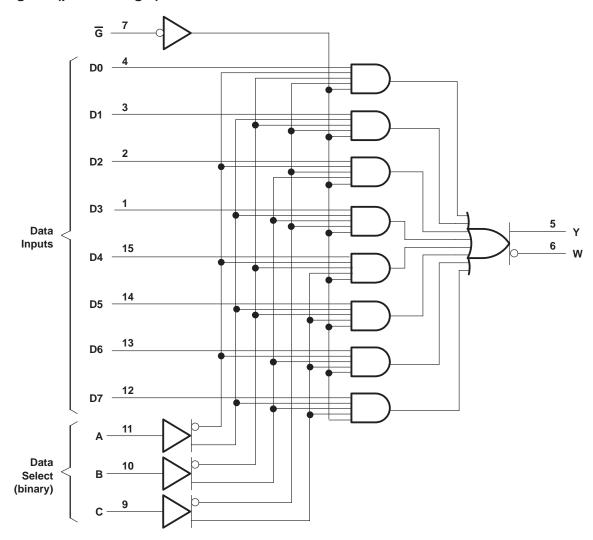

Pin numbers shown are for the D, J, and N packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V _{CC}		 	-0.5 V to 7 V
Input voltage range (see Note 1)		 	-1.2 V to 7 V
Input current range		 	-30 mA to 5 mA
Voltage range applied to any output in th	ne high state	 	-0.5 V to V _{CC}
Current into any output in the low state:	SN54F151B	 	40 mÅ
	SN74F151B	 	48 mA
Operating free-air temperature range:	SN54F151B	 	-55°C to 125°C
	SN74F151B	 	0°C to 70°C
Storage temperature range		 	$-65^{\circ}C$ to $150^{\circ}C$

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
NOTE 1: The input values rating may be exceeded accorded to the input aurent rating in opported.

NOTE 1: The input voltage rating may be exceeded provided that the input current rating is observed.



SDFS023A - D2932, MARCH 1987 - REVISED OCTOBER 1993

recommended operating conditions

		SN54F151B			SN74F151B			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
VIH	High-level input voltage	2			2			V
VIL	Low-level input voltage			0.8			0.8	V
Iк	Input clamp current			-18			-18	mA
ЮН	High-level output current			- 1			- 1	mA
IOL	Low-level output current			20			24	mA
TA	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER			SI	SN54F151B			SN74F151B			
PARAMETER		EST CONDITIONS	MIN	TYP†	MAX	MIN	TYP†	MAX	UNIT	
VIK	V _{CC} = 4.5 V,	lj = -18 mA			-1.2			-1.2	V	
Veri	V _{CC} = 4.5 V,	I _{OH} = – 1 mA	2.5	3.4		2.5	3.4		V	
Vон	V _{CC} = 4.75 V,	I _{OH} = – 1 mA				2.7			v	
V _{OL}	$V_{CC} = 4.5 V,$	I _{OL} = 20 mA		0.3	0.5		0.3	0.5	V	
lj	V _{CC} = 5.5 V,	$V_{I} = 7 V$			0.1			0.1	mA	
IIН	V _{CC} = 5.5 V,	V _I = 2.7 V			20			20	μA	
١ _{IL}	V _{CC} = 5.5 V,	V _I = 0.5 V			- 0.6			- 0.6	mA	
los‡	V _{CC} = 5.5 V,	$V_{O} = 0$	-60		-150	-60		-150	mA	
ICC	V _{CC} = 5.5 V,	V _I = 4.5 V		13.5	21		13.5	21	mA	

[†] All typical values are at V_{CC} = 5 V, $T_A = 25^{\circ}$ C.

[‡]Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

switching characteristics (see Note 2)

PARAMETER	FROM (INPUT)	ТО (OUTPUT)	CI RI	CC = 5 V _ = 50 pl _ = 500 9 _ = 25°C	F, Ω,	C R	L = 50 p L = 500 s			UNIT
				F151B		SN54F	151B	SN74F	151B	
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
^t PLH		W	3.8	5.2	9	2	11.5	3.5	9.5	ns
^t PHL	A, B, or C	vv	2.9	4.3	7.5	2.6	8	2.7	7.5	115
^t PLH	A, B, or C	Y	4.5	6	10.5	4	13.5	4	12	ns
^t PHL		T	4	5.6	9	3.6	9.5	3.6	9	115
^t PLH	G	W	3	4.1	6.1	3	7.5	3	7	ns
^t PHL	9	vv	2.8	3.5	6	2.5	6.5	2.5	6	115
^t PLH	G	Y	4.4	5.3	9.5	3.8	12	3.8	10.5	
^t PHL	9	T	3.5	4.5	7	3	8	3	7.5	ns
^t PLH	Data	10/	2.7	3.6	6.5	1.8	7.5	2.3	7	
^t PHL	(any D)	W	1.2	1.9	4	1	6	1	5	ns
^t PLH	Data	Y	2.9	3.7	6.5	2.4	8.5	2.5	7.5	00
^t PHL	(any D)		3.3	4.2	7	2.1	9	2.6	7.5	ns

§ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions. NOTE 2: Load circuits and waveforms are shown in Section 1.



IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1998, Texas Instruments Incorporated